

## AVIO

construction for special tasks




- > Installation depth 74 mm
- > Glazing up to 48 mm, allowing the use of warm glass units
- > Optional STV glass bonding
- > High resistance to deformations
- > Easy care thanks to large and smooth rebate area
- > A large selection of surface finishes – smooth, wooden, matt and metallic


Technical characteristics	Avio
Installation depth	74 mm
Glass unit thickness	up to 48 mm
STV glass bonding	STV technology
Number of seals	2
Fittings	Roto Komfort; Roto Multi; Roto Designo
Coefficient	1.1 W/m <sup>2</sup> K

**Avio** is the system of window profiles with the increased static parameters of the construction. Specially designed, spacious chamber is adapted for installation of large steel reinforcements, which results in very high bending resistance. The window equipped with such solution is characterized by the very high dimensional stability. This is particularly important for large window structures.

Colour

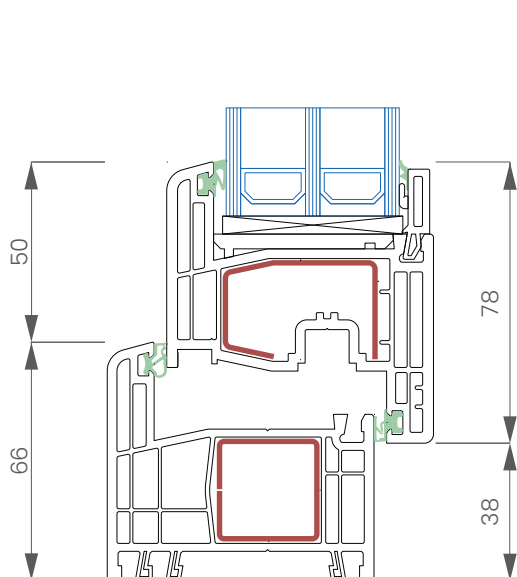

Vertical cross-section

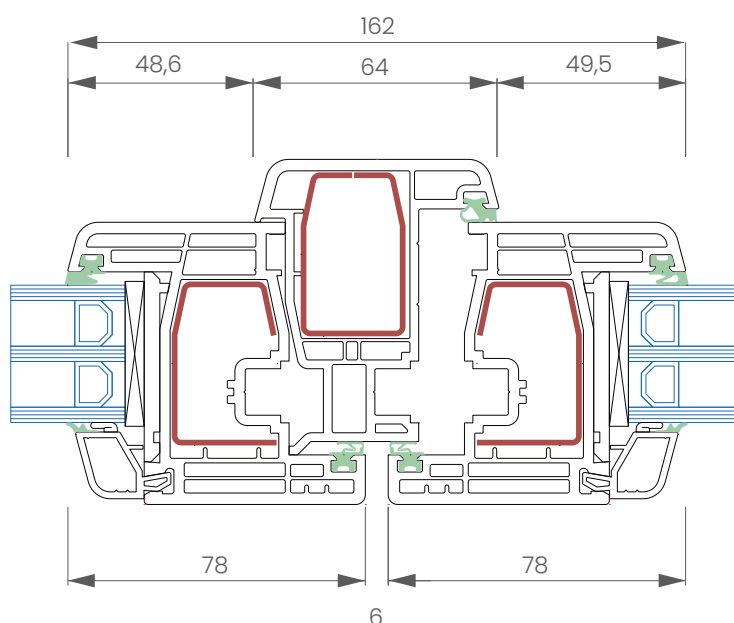

Horizontal cross-section