

ELEGANT SWISS

minimalist design for the Swiss market



- > Glazing up to 48 mm for use with warm glazing units
- > Three perimeter gaskets for maximum thermal insulation and watertightness
- \rightarrow 6-chamber technology excellent thermal insulation up to $U_f = 0.94 \text{ W/(m}^2\text{K)}$
- > Wide range of surface finishes smooth, wood-like, matt and metallic


Technical specifications	Elegant Swiss
Installation depth	76 mm
Possible glazing width	up to 48 mm
Glass bonding	as an option
No of gaskets	3
Hardware	Roto Komfort; Roto Multi; Roto Designo
Thermal insulation	$U_f = 0.94 \text{ W/(m}^2\text{K})^*$, $U_f = 1.1 \text{ W/(m}^2\text{K})^{**}$


^{*} Value determined by the Hot Box method, with steel reinforcement in the frame

The **Elegant Swiss** windows are a solution dedicated to the Swiss market (with characteristic 47 mm long rebates in the frame). They are also the unique design of slim and simple forms and excellent finishing details. Equipped with high-quality components for convenient use, they meet the highest requirements in terms of size and thermal and acoustic insulation.

Colours



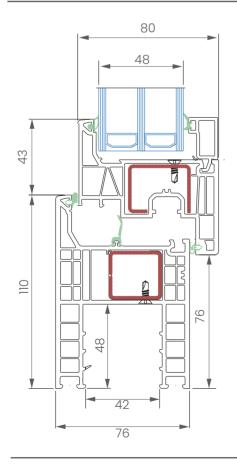

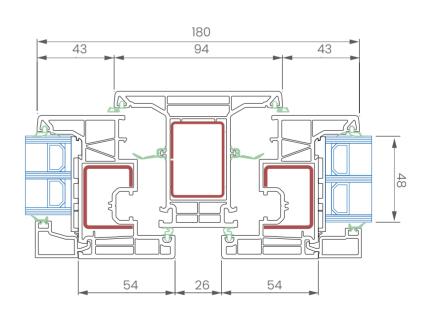



^{**} Calculation according to ISO 10077-2 with 36 m filling material