

INTEGRO

integrated benefits of thermal insulation and statics



- › Installation depth 82.5 mm
- › Glazing up to 48 mm, allowing the use of warm glass units
- › Optional STV glass bonding
- › Three peripheral seals – guaranteeing maximal thermal and acoustic insulation parameters
- › The 6-chambers technology
- › Deeper glass settlement thanks to the higher glazing bead of 26 mm
- › A large selection of surface finishes – smooth, wooden, matt and metallic, optionally with aluminium covers


Technical characteristics**Integro**

Number of chambers	6
Installation depth	82,5 mm
Glass unit thickness	up to 48 mm
Glass bonding	with STV technology
Number of seals	3
Fittings	Roto Komfort; Roto Multi; Roto Designo
Thermal insulation*	0.77 W/(m²K)


*Value provided for a reference window 1230x1480 mm with glazing Ug = 0,5

Integro – the standard of passive windows using steel reinforcements resistant to deformation is the main advantage of the Integro window system. The great thermal insulation parameters of $U_w = 0.77 \text{ W/(m}^2\text{K)}$, guarantee energy savings at the highest level. Thanks to its excellent static properties, the Integro system is ideal for constructing large window elements in darker colours.

Colour

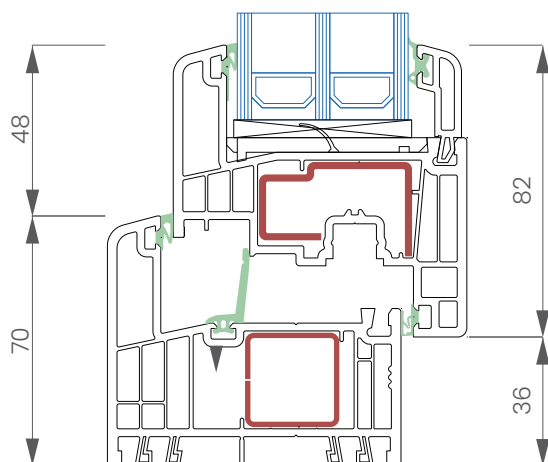

Vertical cross-section

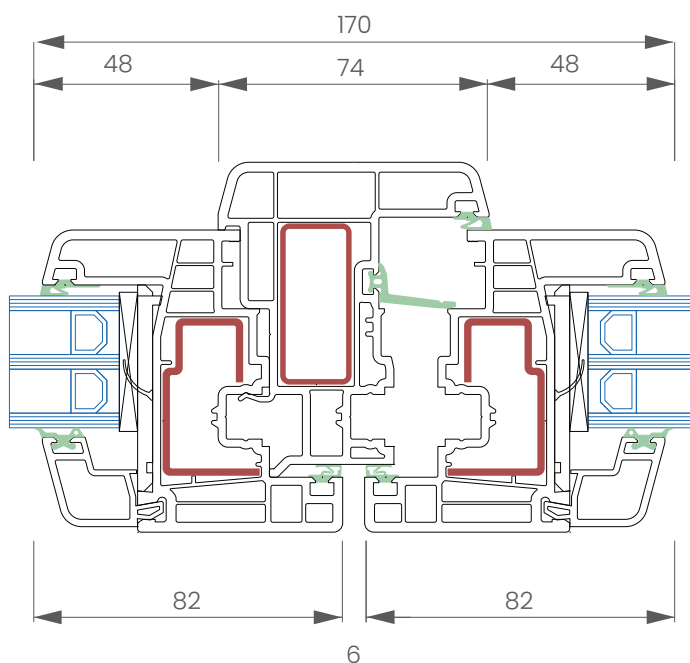

Horizontal cross-section